




# UGY1125PS

## UNIVPOWER SILENT SERIES

### POWER OUTPUT

Prime Rating — 900 kW (1125 kVA)  
 Standby Rating — 990 kW (1237.5kVA)  
 3-Phase, 50 Hertz, 0.8 PF

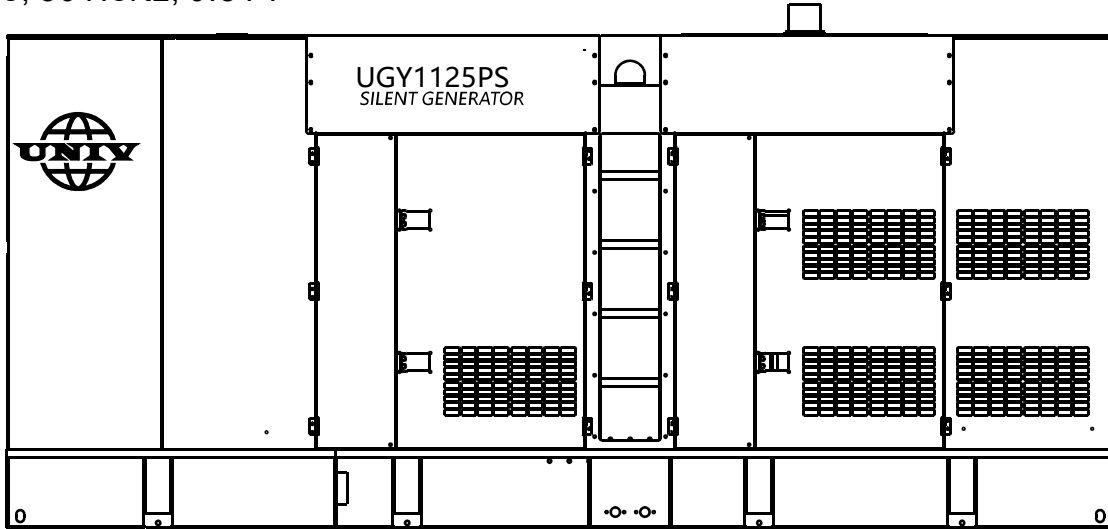

### STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
  - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
  - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to  $\pm 0.25\%$ .
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 88dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel  
E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
  - High visibility LCD display with heated screen and alphanumeric readout.
  - IP65 Protection standard, operational temperature range of -40° to 85° C.
  - Modbus interface for gauge panel and expansion options.
  - DPF cleaning cycle indication.
  - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.


### UNIVPOWER SILENT SERIES

UNIV POWER DECIBEL LEVELS	
Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. UNIVGensets good for home, construction sites, residential, hospital, etc.	<p><b>90</b> — Subway / truck traffic</p> <p>→ <b>UNIVGenset at 7m</b></p> <p><b>80</b> — Average city traffic</p> <p><b>70</b> — Inside car at 60 mph</p> <p><b>60</b> — Air conditioner at 6m</p> <p><b>50</b> — Normal conversation</p>

# 88.0

DECIBELS

### GENERATOR OUTPUT PANEL

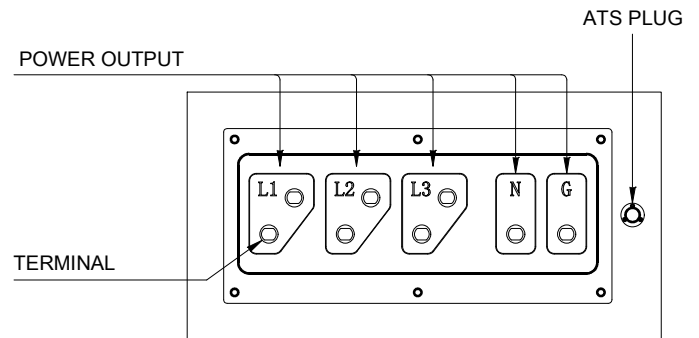



# UGY1125PS

## UNIVPOWER SILENT SERIES

### SPECIFICATIONS

Generator Specifications	
Model	Revolving field, self-ventilated weatherproof
Armature Connection	Star with Neutral
Phase	3
Standby Output	1000KW (1237.5KVA)
Prime Output	900KW (1125KVA)
Power Factor	0.8
Voltage Regulation (No load to full load)	±0.5%
Generator RPM	1500
Frequency	50 Hz
No. of Poles	4
Excitation	Brushless with AVR
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.
Insulation	Class H
Sound Level dB(A) Full load at 7M	88

Amperage	
Rated Voltage	Maximum Amps
3Ø Volt 230/400	1623.8 Amps
3Ø Volt 220/380	1709.3 Amps
Main Line Circuit Breaker Rating	2000 Amps
Over Current Relay Trip Set Point 400V Mode	2200 Amps

Fuel System	
Fuel Tank Capacity	264.2 gallons (1000 liters)
Fuel Consumption	L / h
At full load	203
At 3/4 load	146
At 1/2 load	98
At 1/4 load	53

Control system	
Controller Brand	Deepsea
Model	DSE6020
Module	Manual/Auto start/stop module
Standard function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	under/over voltage
	under/over speed
	under/over frequency
	Low oil pressure
	High water temperature
Communication port	USB

Engine Specifications	
Make / Model	Perkins / 4008-30TAG3
Emissions	/
Starting System	Electric
Design	4-cycle, water cooled, direct injection, Turbocharged
Displacement	30.5 liters
No. cylinders	8
Bore x Stroke	160 x 190 mm
Gross Engine Power Output	1481 hp (1105 kW)
Compression Ratio	13 : 1
Engine Speed	1500 rpm
Overspeed Limit	1725 rpm
Oil Capacity	40.4 gallons (153 liters)
Coolant Capacity	37.0 gallons (140 liters)
Battery	24V 150Ah x 4

Alternator	
Alternator Brand	Stamford/Mecc alte/Dingol
Alternator Model	S6L1D-F4/ECO43 2M4A/DG634F
Excitation	Brushless, Self-Excited system
Capacity(KVA)	1000kva
Power(KW)	800kw
Efficiency(%)	92%
Insulation class	Class H
Protection class	Ip23
Steady state voltage regulation	±1%
Voltage control	AVR

### WARRANTY\*

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



### NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




# UGY1125PS

## UNIVPOWER SILENT SERIES

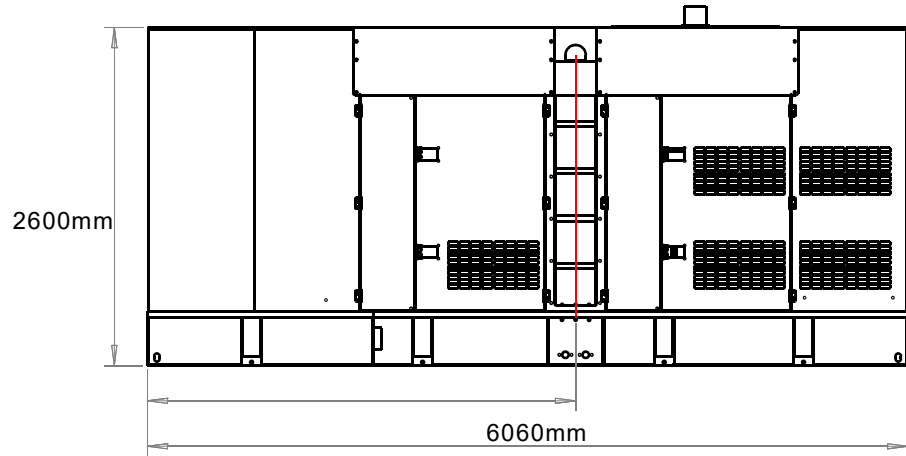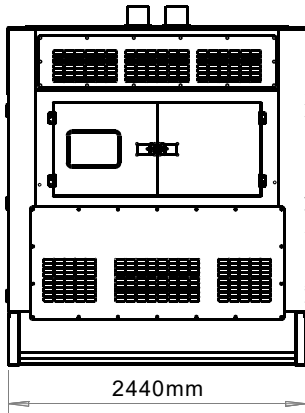

### Weight

Dry Weight	20,062 lbs. (9,100 kg)
Wet Weight	21,164 lbs. (9,600 kg)
Max. Lifting Point capacity	40,124 lbs. (18,200 kg)

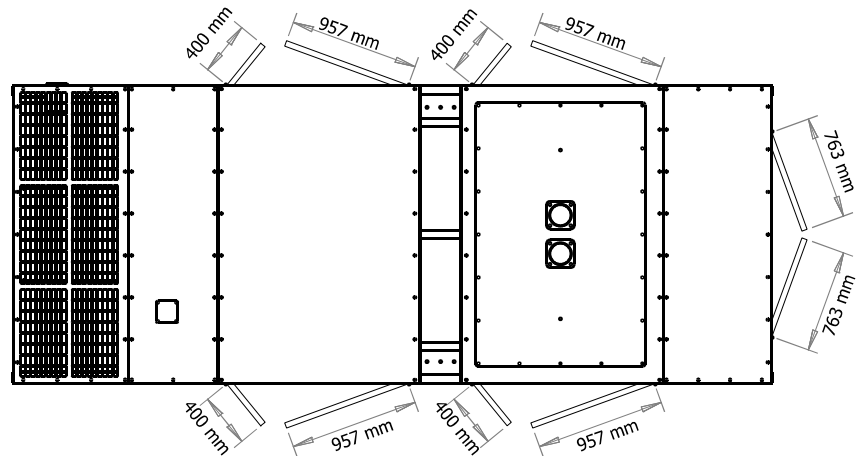

Manufactured by  
**Zhejiang Universal Machinery Co., Ltd**  
 Add: No 18-9 Nanshan Road, Qujiang Zone,  
 Quzhou city, Zhejiang Province, CN  
 Tel: 0086-570-3377022  
 Fax: 0086-570-3377023  
 Website: [www.univpower.com](http://www.univpower.com)